

MCA 20 系列 SERIES

●自動切帶及送帶的功能：可縫製各種鬆緊帶製品，特別是縫製圓筒型製品的接頭，車縫中鬆緊帶可以在壓布腳前自動快速切斷再重疊車縫，接頭平整美觀，有26組工程記憶，每組8段（最多可連結208段）。

●Auto Cutting and Re-Insert : To any Elastic Attaching Sewing. Special for Connecting the Circular Sewing. During the Sewing Operation, It can Auto cut the Tape Fast in front of the Presser Foot for Covering Sewing to Make the Flat and Beautiful joint. 26 programs, 8 tensions available for each program (Max. 208 tensions are available after combination).

MCA 20K-38 包縫車用 FOR OVERLOCK MCA 20K-64 包縫車用 FOR OVERLOCK MCA 20K-38/TR/TFU/RTA



特殊機型 · 訂貨生產
AVAILABLE FOR CUSTOM-MADE
筋縫車用 FOR COVERSTITCH
人字車用 FOR ZIG-ZAG

範例 EXAMPLE

- ▶ MCA 20K-01
- ▶ MCA 20K-02
- ▶ MCA 20K-03
- ▶ MCA 20K-04
- ▶ MCA 20K-05

- ▶ MCA 20C-01
- ▶ MCA 20C-02
- ▶ MCA 20Z-01
- ▶ MCA 20Z-02

● 訂貨說明 Order guide

MCA20K- 38/TR/TFU/RTA/ PEGASUS EX5100

- 1 機型代號：微電腦多功能鬆緊帶控制裝置
- 2 送帶寬度(最寬)
- 3 選擇配件
- 4

● Model for Multi-Function Computerized Elastic Metering Device :

● Feeding Width (MAX)(inch)

38: 38mm (1 1/2")	<p>專用壓腳 Exclusive Presser Foot</p>	三線用 For 3 thread	3.5~ 13mm(1/4")	標準配件 Standard Parts	零件編號 Part No 163
		四線用 For 4 thread	8~ 26mm(1")	選擇配件 Optional Parts	零件編號 Part No 164
			19~ 38mm(1 1/2")	選擇配件 Optional Parts	零件編號 Part No 165
64: 64mm (2 1/2")	<p>專用壓腳 Exclusive Presser Foot</p>	三線用 For 3 thread	25~ 50mm(2")	標準配件 Standard Parts	零件編號 Part No 166
		四線用 For 4 thread	38~ 64mm(2 1/2")	選擇配件 Optional Parts	零件編號 Part No 167
19: 19mm (3/4")	特殊機型 · 訂貨生產 AVAILABLE FOR CUSTOM-MADE				

● Optional Parts


TFU : 上送型送料機，參考P.14 Upper Tape Feeder , Please refer to P.14



TR : 鬆線裝置 : Thread Release Device :



● 縫畢時可將車針的縫線放鬆便於切斷
● Release the thread for cutting thread easily after sewing.

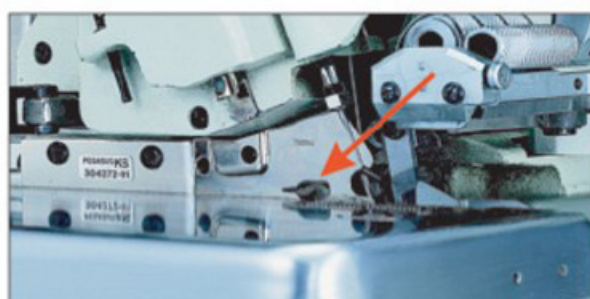


● 適用於有安裝吸入式線頭切斷裝置的包縫車
● Suitable for Overlock with Chain Cutter and Vacuum.

RTA:切帶後鬆緊帶張力保持裝置
Remain Tape Tension after Tape cutting


縫製各種鬆帶製品，特別是縫製圓筒型製品的接頭，將切斷後的鬆緊帶仍然能夠保持需求的張力，使接頭美觀的重疊

To any elastic attaching sewing. Special for connecting of the circle sewing. Remain required tape tension after cutting for perfect overlap joint.

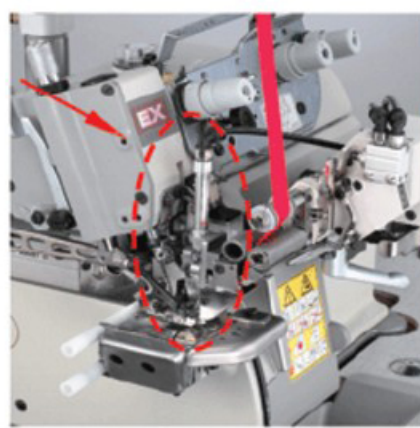

RTA-22 : 適用範圍6~22mm(1/4"~7/8")
Available Range 6~22mm (1/4"~7/8")
RTA-50 : 適用範圍20~50mm(1"~2")
Available Range 20~50mm (1"~ 2")

RTA : 用途說明 PURPOSE

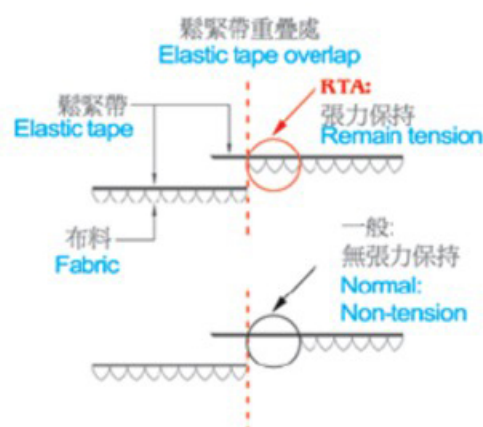

需空壓設備 Air compressor required